

HEATERS FOR DISSOLVING HEAVY OIL VAT BOTTOM RESIDUES AND PARAFFIN DEPOSITS

- AISI 321 sheath
- Ø 8/10/16 mm
- IP68 protection
- 230V on 1"1/4 and 1"1/2;
- 400/3V on 2" and 2"1/2



USE

Heater to dissolve sludge, oil and deposits and to restore the normal fluidity of the liquid. This also makes cleaning the tanks more easy.

CHARACTERISTICS

ARMOURED: the heating element is electrically insulated and protected according to IEC standards; contact terminals are submerged in a resin casting that prevents all infiltration; the electric cable is protected by a continuous-immersion sheath.

READY TO USE: to be inserted from the top, laying the horizontal heating part on the bottom.

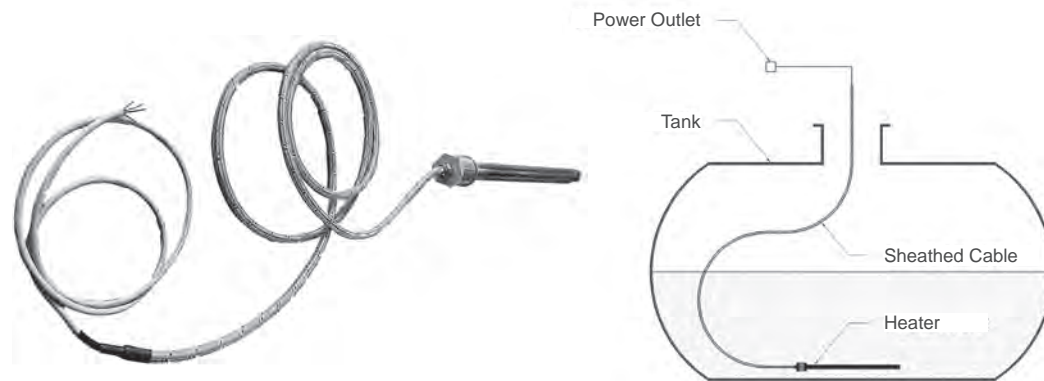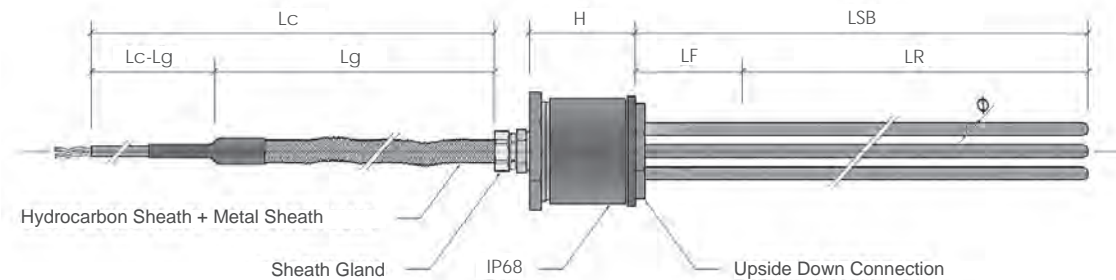

Lsb./mm	Brass connection	Cable	Watts	Volts	Ø	Code
1000 rip.	1" 1/4	2+2 mt.	1000	230	8	111.X.006310
1000 rip.	1" 1/2	2+2 mt.	1500	230	8	111.X.006320
500	2"	4+2 mt.	1500	400/3	10	111.X.006330
1000	2"	4+2 mt.	3000	400/3	10	111.X.006340
1000	2" 1/2	4+2 mt.	3000	400/3	16	111.X.006350
1000	2" 1/2	4+2 mt.	4500	400/3	16	111.X.006360
2000	2" 1/2	4+2 mt.	6000	400/3	16	111.X.006370

