

TTS THERMTRACE® SUPER

ThermTrace® Super is an industrial grade self-regulating heating tape that may be used for freeze protection, or temperature maintenance of pipework and vessels.


- Self-regulating
- 6 power output ranges
- Cut-to-length



TECHNICAL DATA

Maximum exposure temperature (unpowered)	210 °C
Maximum operating temperature	120 °C
Nominal voltage	230 V
Minimum installation temperature	-45 °C
Buswires	nickel coated copper
Minimum bending radius	25 mm

Mod.	Power out 10°C metal pipes W/m	Max temp. °C	Dim.
10 TTS-2	10	210	10,5 x 4,0
15 TTS-2	15		
20 TTS-2	20		
30 TTS-2	30		
45 TTS-2	45		
60 TTS-2	60		
75 TTS-2	75	210	12,5 x 5,0
10 TTS-2-BOT	10		
15 TTS-2-BOT	15		
20 TTS-2-BOT	20		
30 TTS-2-BOT	30		
45 TTS-2-BOT	45		
60 TTS-2-BOT	60		
75 TTS-2-BOT	75		

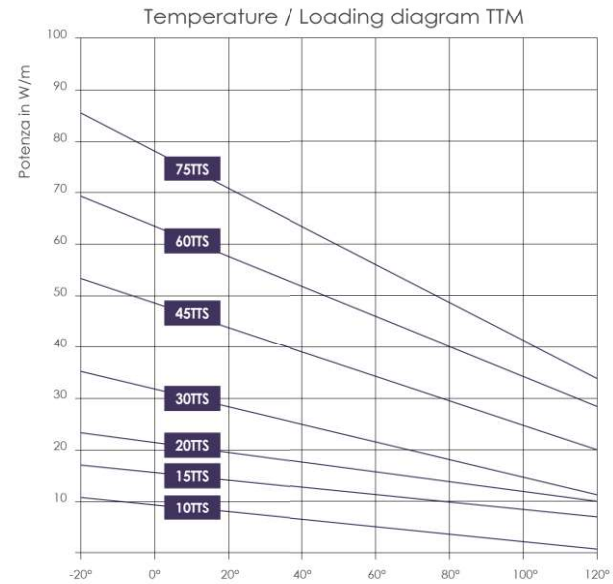

Mod.	Circuit breaker	Start up temperature		
		+ 10 °C	- 10 °C	- 20 °C
10 TTS	16 A	190 m	182 m	170 m
	25 A	193 m	183 m	171 m
	32 A	194 m	185 m	174 m
15 TTS	16 A	155 m	130 m	119 m
	25 A	157 m	147 m	135 m
	32 A	159 m	148 m	135 m
20 TTS	16 A	120 m	109 m	93 m
	25 A	137 m	128 m	119 m
	32 A	139 m	130 m	120 m
30 TTS	16 A	81 m	71 m	65 m
	25 A	109 m	104 m	97 m
	32 A	113 m	107 m	99 m
45 TTS	16 A	60 m	58 m	43 m
	25 A	84 m	79 m	69 m
	32 A	90 m	85 m	82 m
60 TTS	16 A	40 m	36 m	32 m
	25 A	63 m	60 m	52 m
	32 A	80 m	71 m	60 m
75 TTS	16 A	35 m	31 m	30 m
	25 A	55 m	48 m	46 m
	32 A	67 m	62 m	60 m

