


# TTX THERMTRACE® X

ThermTrace® X is a construction / industrial grade self-regulating heating tape that may be used for freeze protection, or temperature maintenance of pipework and vessels.

- Self-regulating
- 3 power output ranges
- Cut-to-length

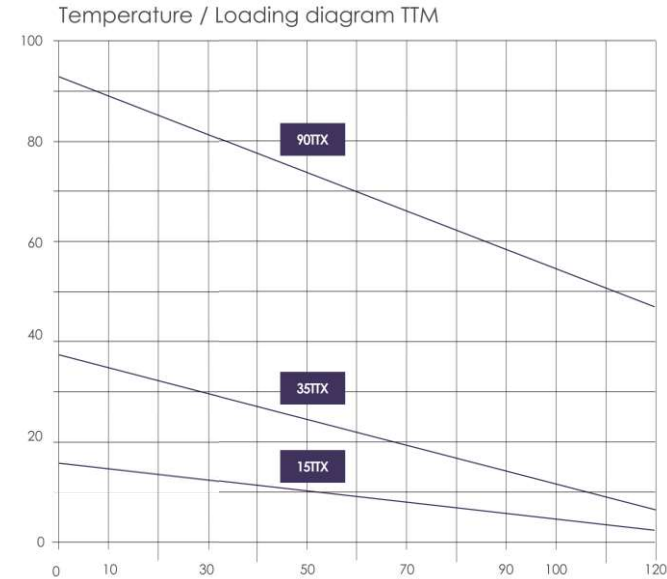

## TECHNICAL DATA

Max temperature	continuous maintenance	165 °C
	intermittent exp.	250 °C
Minimum installation temp.		-60 °C
Temperature rating		T2 (300 °C)
Supply voltage		230 V c.a. 115V on request
Minimum bending radius		25 mm

Mod.	Power output at 10°C on metal pipes W/m	Maximum temperature °C	Nominal dimension
15 TTX-2-BOT	15	250	14,0 x 5,5
35 TTX-2-BOT	35	250	14,0 x 5,5
90 TTX-2-BOT	90	250	14,0 x 5,5

Mod.	Circuit breaker	Start up temperature		
		- 10 °C	0 °C	+ 10 °C
15 TTX	10 A	118 m	122 m	128 m
	20 A	170 m	170 m	170 m
	25 A	171 m	171 m	171 m
	32 A	173 m	173 m	173 m
	40 A	173 m	173 m	173 m
35 TTX	10 A	47 m	51 m	53 m
	20 A	95 m	99 m	105 m
	25 A	106 m	106 m	106 m
	32 A	107 m	107 m	107 m
	40 A	108 m	108 m	108 m
90 TTX	10 A	16 m	17 m	18 m
	20 A	31 m	33 m	35 m
	25 A	40 m	41 m	43 m
	32 A	51 m	52 m	55 m
	40 A	61 m	63 m	64 m